



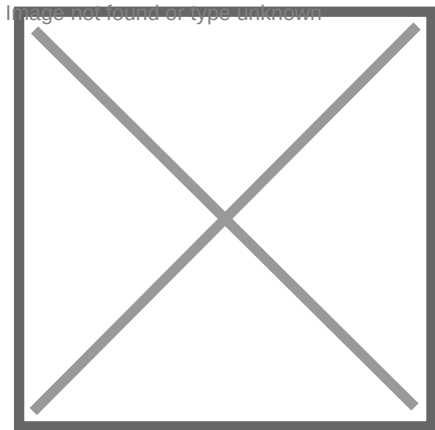

Technical information

Productnumber : 712S2R1575

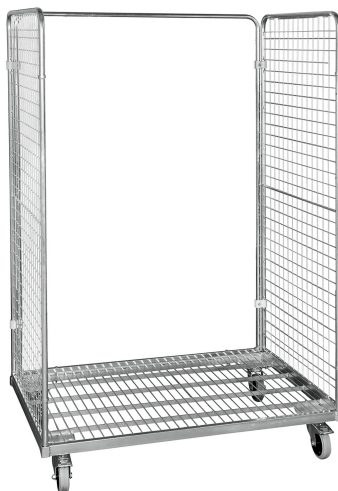

Product description

Sturdy 2-sided roll container with a steel rolling floor with flexible rubber wheels and a tubular frame at the rear for reinforcement. Fast assembly and disassembly of the insert gates. 2 nylon lashing straps are supplied as standard with each roll container. Extra option to provide the roll container with steel floors. Very suitable for the distribution of products to and from shops and internal transport.

Specifications

Article arrangement: New

Version: input gates

Walls: mesh

Wheels front: 2 castor wheels solid rubber 125 mm

Wheels back: 2 fixed wheels, solid rubber 125 mm

Colour: colorless

Length (mm): 1200

Width (mm): 800

Height (mm): 1820

Loading capacity (kg): 600

Additional specifications: rubber wheels

Type: 2-sides

Material: steel

Floor: steel

Subgroup: 2-Sides

Shelves: excl. shelves

Surface treatment: electro-galvanized

Internal length (mm): 1150

Internal width (mm): 790

Internal height (mm): 1600

Type number: 702S02

EAN Code (Gtin) 8719424136340

Scan the QR code for more information



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment