


Image not found or type unknown



Technical information

Productnumber : 75.146.812.123

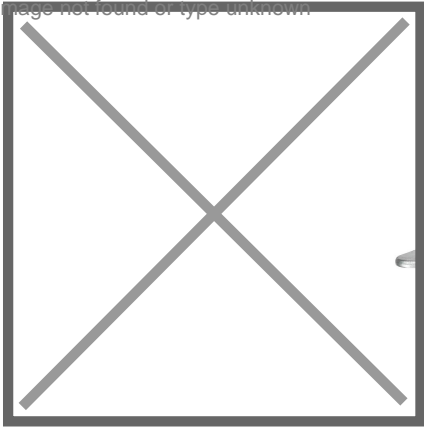

Product description

for more information see manual.

Advantages: The polyamide wheels have low rolling resistance, offer good handling on flat surfaces, are shock and impact resistant and resistant to corrosion.

Applications: Industrial carts, material handling in factories, waste containers, transport containers, metal and chemical companies, roll containers for medium-heavy loads, tool trolleys, storage trolleys.

Suitable surface: Hard and flat such as tiles, cement and coatings.

Suitable environment: Dry and not permanently damp. With different chemicals and with saturated steam.

Specifications

Article arrangement: New

Version: Ø 125 mm

Top: base plate 105x85 mm

Bolt hole: Ø 9 mm

Surface treatment: galvanized

Width (mm): 40

Loading capacity (kg): 250

Wheel bearing: roller bearing

EAN Code (Gtin) 8719424013795

Type: castor wheel with brake

Material: polyamide wheel

Hole centres: 80x60 mm

Colour: colorless

Length (mm): 125

Height (mm): 155

Weight (kg) 1

Type number: 754681

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment