




## Technical information

**Productnumber : 75.140.812.200**

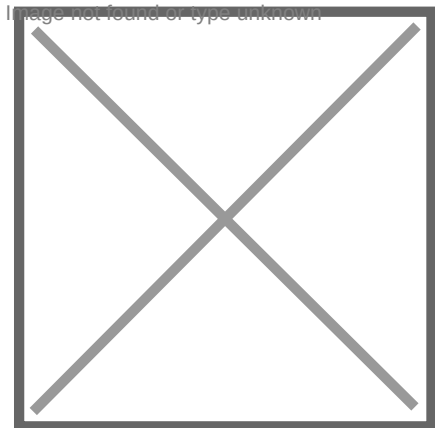

### Product description

Benefits: The polyamide wheels have a low rolling resistance, offer good handling on smooth surfaces, they are shock and impact resistant and corrosion resistant.

Applications: Industrial carts, material handling in factories, waste containers, transport containers, metal working and chemical companies, medium load roll containers, tool trolleys, warehouse carts.

Suitable surface: Smooth and hard surface such as tiles, cement and coatings.

Suitable environment: Dry and not permanently humid. For many chemicals and for saturated steam.

### Specifications

Article arrangement: New

Version: Ø 200 mm

Top: bolt hole fitting 13 mm

Colour: colorless

Length (mm): 200

Height (mm): 235

Wheel bearing: roller bearing

Temperature resistance: -20 / +60°C

Type: castor wheel

Material: polyamide wheel

Bolt hole: Ø 13 mm

Surface treatment: galvanized

Width (mm): 50

Loading capacity (kg): 300

Type number: 75812100

EAN Code (Gtin) 8719424147230

Scan the QR code for more information



**KRUIZINGA.NL<sup>®</sup>**  
Opslag- en transportmiddelen

**KRUIZINGA.DE<sup>®</sup>**  
Lager- und Transportmittel

**KRUIZINGA.FR<sup>®</sup>**  
Stockage et ressources de transport

**KRUIZINGA.COM<sup>®</sup>**  
Material handling equipment