


Image not found or type unknown



Technical information

Productnumber : 42.196.29.639

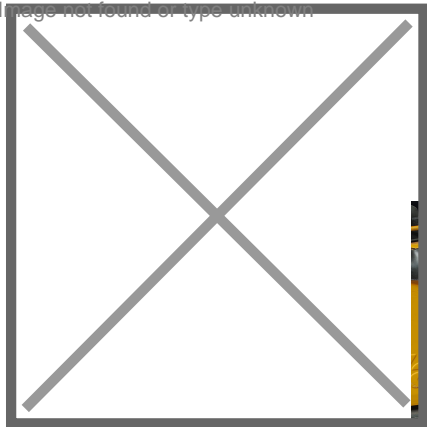

Product description

Steel protection bar with spring elements for protection against collision damage, securing machines and workplaces and separating traffic routes. Equipped with additional polyurethane spring elements. The UV-resistant and durable elastic element absorbs and ensures that the bracket can tilt up to 10 degrees. The striking yellow brackets are made of 3 mm thick high-quality steel with a diameter of 76 mm and provided with black signal stripes. The dimensions of the feet/bottom plates are 160x140x10 mm (lxwxh) and are each provided with 4 drilled holes with a diameter of 14 mm. protection bracket with spring element consisting of glue, plugs, nuts, washers, for 8 holes (article number: 42.109.20.858)

Specifications

Article arrangement: New

Type: bumper protection

Version: flexible crash protection bar, plastic-coated and galvanized - 2000/390 mm

Material: steel

Subgroup: Protection guards

Colour: black/yellow

Surface treatment: plastic-coated and galvanized

Width (mm): 2000

Height (mm): 390

Weight (kg) 17.6

Type number: 42-SB-G

Additional specifications: for indoor and outdoor use

EAN Code (Gtin) 8719424059489

Scan the QR code for more information



KRUIZINGA.NL®
Opslag- en transportmiddelen

KRUIZINGA.DE®
Lager- und Transportmittel

KRUIZINGA.FR®
Stockage et ressources de transport

KRUIZINGA.COM®
Material handling equipment